



## Type W Three-Conductor Round Portable Power Cable 2kV


### » Applications .....

These cables are designed for general use where bare grounding conductors are not required or desired.

### » Standards .....

ICEA S-75-381/NEMA WC 58  
ASTM B 172  
ASTM B 33  
CAN/CSA C22.2 No. 96

### » Construction .....

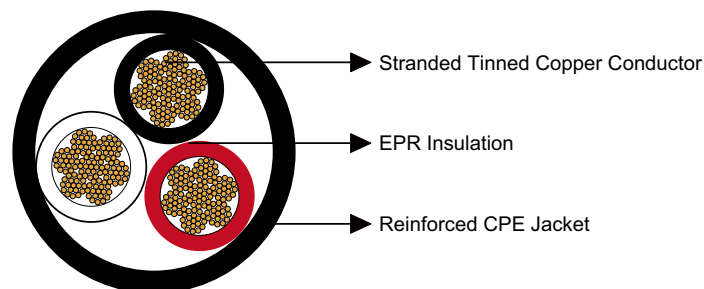

#### **Conductors:**

Stranded annealed tinned copper conductor.

#### **Insulation:**

Ethylene Propylene Rubber (EPR).

#### **Jacket:**

Reinforced heavy-duty/extra-heavy-duty Chlorinated Polyethylene (CPE), black. (Cables having a nominal outside diameter of more than 2.0 inches require extra-heavy-duty jackets.)

### » Options .....

- Other jacket materials such as CSP/PCP/NBR/PVC are available upon request.
- Two-layer jacket with reinforcing fibre between the two layers can be offered as an option.



# Caledonian Mining Cables

## Portable Power Cables

### » Mechanical and Thermal Properties .....

Minimum Bending Radius: 6×OD

Maximum Conductor Operating Temperature: +90°C

### » Dimensions and Weight .....

Construction	No. of Strands	Nominal Insulation Thickness		Nominal Jacket Thickness		Nominal Overall Diameter		Nominal Weight		Ampacity
		inch	mm	inch	mm	inch	mm	lbs/kft	kg/km	
No. of cores×AWG/ kcmil	-									A
3×8	133	0.06	1.5	0.125	3.2	0.91	23.1	550	818	59
3×6	133	0.06	1.5	0.140	3.6	1.01	25.7	730	1086	79
3×4	259	0.06	1.5	0.155	3.9	1.17	29.7	1020	1518	104
3×2	259	0.06	1.5	0.155	3.9	1.34	34.0	1430	2128	138
3×1	259	0.08	2.0	0.170	4.3	1.51	38.4	1800	2678	161
3×1/0	266	0.08	2.0	0.170	4.3	1.65	41.9	2140	3184	186
3×2/0	342	0.08	2.0	0.190	4.8	1.75	44.5	2580	3839	215
3×3/0	418	0.08	2.0	0.190	4.8	1.89	48.0	2922	4347	249
3×4/0	532	0.08	2.0	0.205	5.2	2.04	51.8	3800	5654	287
3×250	741	0.095	2.4	0.220	5.6	2.39	60.7	4368	6500	320
3×350	888	0.095	2.4	0.235	6.0	2.66	67.5	5895	8772	394
3×500	1221	0.095	2.4	0.250	6.4	2.98	75.8	7820	11638	487

Ampacity-Based on a conductor temperature of 90°C and an ambient air temperature of 40°C, per ICEA S-75-381.